

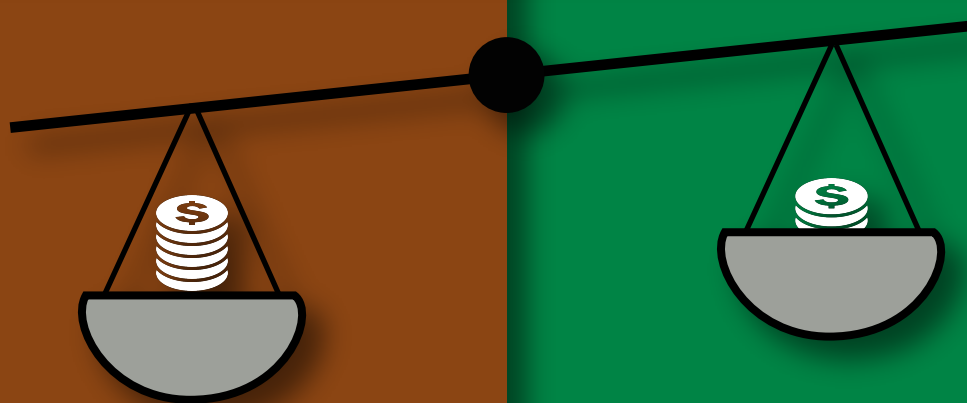
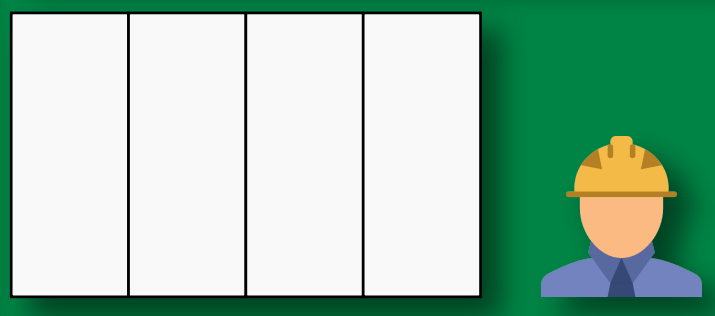


PLYWOOD HOARDING VS **GREENLOC PANELS**

COST
 Installing plywood hoarding requires long hours of costly labour and expensive materials. The Greenloc panels have a simple "quick snap" installation method and can be reused multiple times.

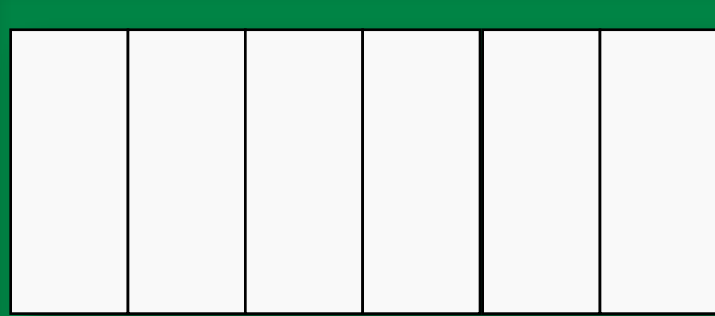



AVERAGE INSTALL SQ FT/ HOUR
 The average installation for the Greenloc panels is 200 sq ft per hour per person. This is considerably lower than the average install time of plywood which requires more labour and more people to be installed.

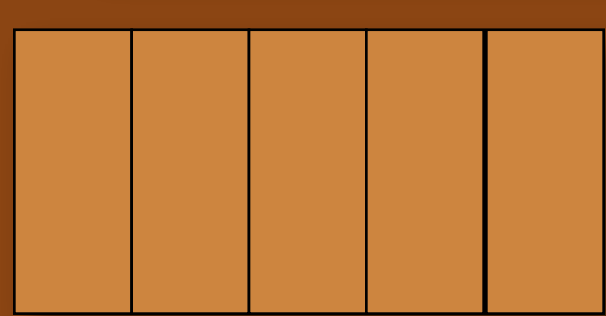




SOUND DAMPENING OPTION
 Traditional plywood hoarding has no sound dampening properties, which can result in complaints from the neighborhood. The Greenloc soundproof panels decrease the noise by 16.5 Db.



ANTI-GRAFFITI FILM OPTION
 Cleaning up graffiti from plywood hoarding is usually a lengthy and expensive process. With the Greenloc Anti-Graffiti film, the graffiti can be easily cleaned off.

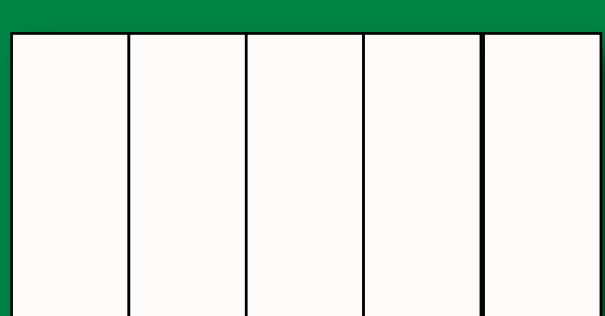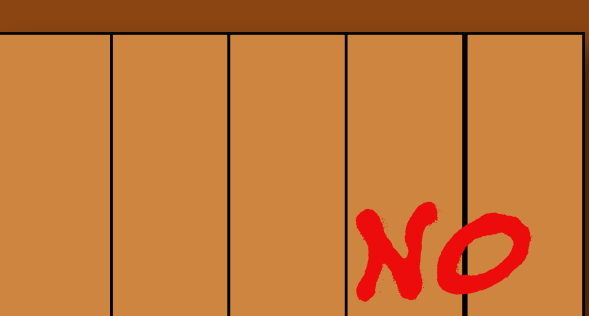

DOUBLE THE ADVERTISING SPACE
 The standard height for plywood hoarding is 8 feet. The Greenloc panels reach 16.5 feet and can be customized to an even higher or smaller length, depending on the project requirements.

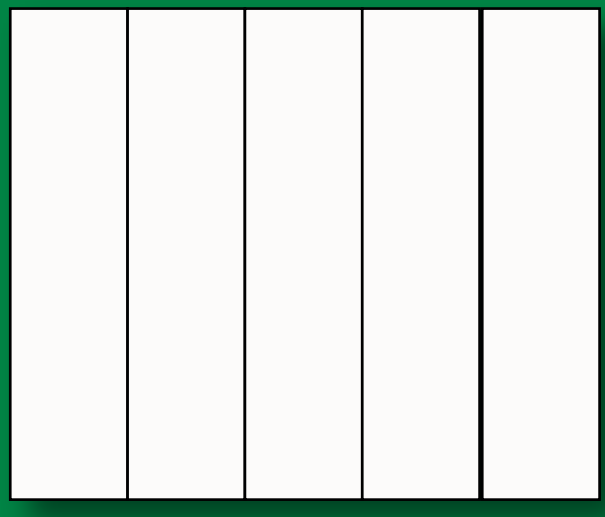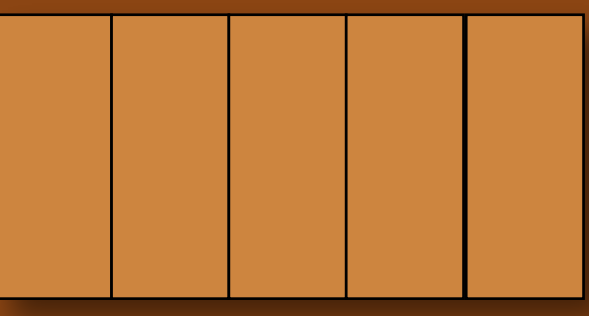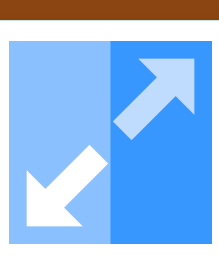

MULTIPLE USE
 Traditional plywood hoarding has a one time use before it ends up in the landfill. Disposing of it is costly and time consuming. The Greenloc panels can be reused at multiple sites before being recycled at the end of their life cycle.

